



NEW!


NYLATECH PVM

Nylatech PVM (pressure/velocity/maximum) was developed to provide a premium material for a variety of applications. Nylatech PVM is a self lubricated material with a low coefficient of friction that can increase the life of equipment.

- Internally Lubricated
- Minimizes Maintenance
- Improves Part Life
- Improves Life of Mating Component
- Reduces Machine/Equipment Noise
- Lower Coefficient of Friction
- Superb Machinability and Surface Finish

SUPERIOR PV VALUES

Frictional Force - Overload PV

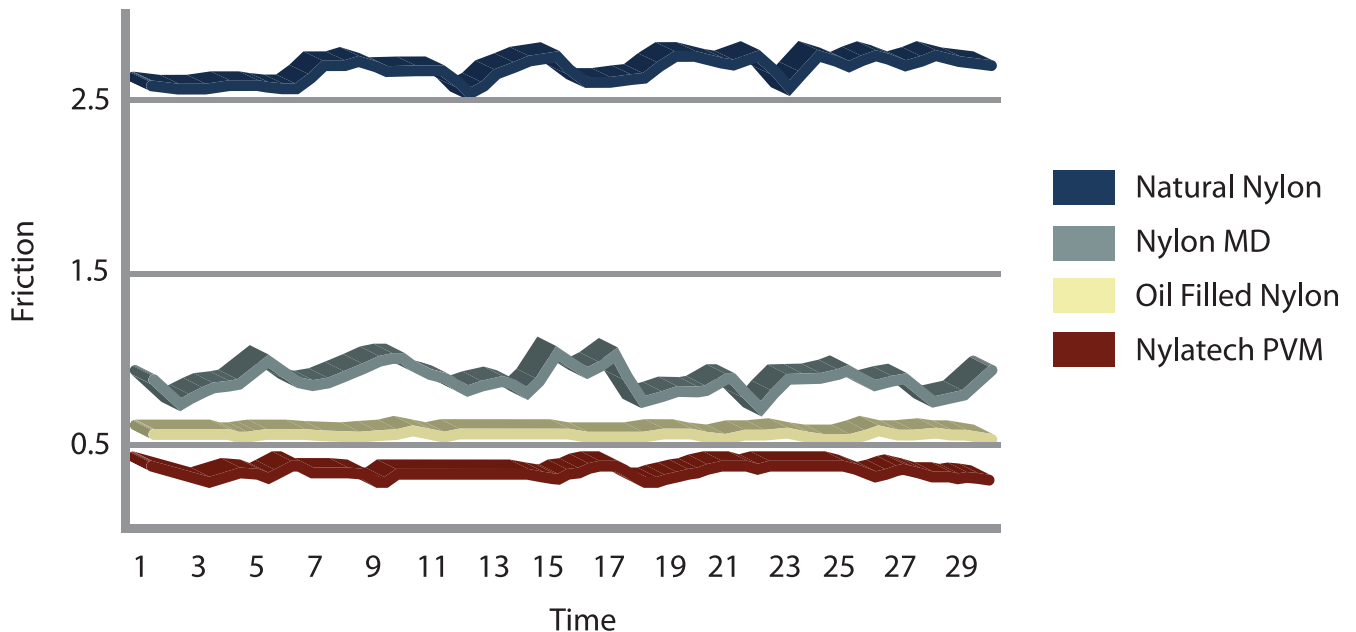

Nylatech PVM offers exceptional PV (pressure times velocity) values resulting in an excellent material for tough load bearing/frictional applications.

- Available in rod, sheet and tube.
- Custom parts available, please call with your specification.



NYLATECH

MEETING TODAY'S CAST NYLON NEEDS

406 LINCOLN STREET EVERSON, WA 98247

Toll Free 1-800-506-9566 (US only)

Phone (360) 966-2838

FX: (360) 966-5319

www.nylatech.com

